



Exxsol™ D145 fluid is a highly refined mineral oil adjuvant used for controlling black Sigatoka in bananas.

Quality, performance, and world-class service



- Non-phytotoxic and fungistatic effects demonstrated in the field.
- Effective control of black Sigatoka proven in the field.
- Successfully used on 8,000 hectares commercially since 2023.
- Registered in key countries, with plans to expand to more.
- Extensive network of terminals and specialized distributors ensures availability and technical-commercial support.

Key Properties

Test	Units	Method	Exxsol™ D145 fluid	Comp. A	Comp. B
Carbon range			C14 – C26	C19-C26	–
Un sulfonated residue	vol%	ASTM D483	99	92	99
Sulfur	ppm	ASTM D2622	<1	–	<2*
Aromatics	wt%	AMS 140.31	0.002	–	<0.03^
Biodegradable		OECD 301F	✓	✓#	✓#

The values in this table represent typical physical properties and are not specification limits. These values may vary over time. The data are derived from tests conducted by or on behalf of ExxonMobil. Competitor information is sourced from public information.
* - measured by ASTM D5453. ^ - measured by an undisclosed UV method. # - measured by OECD 306 in seawater.

Scan to learn more!

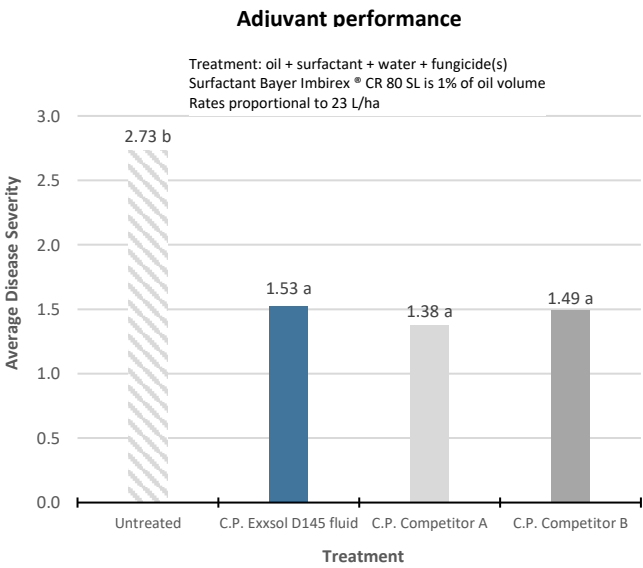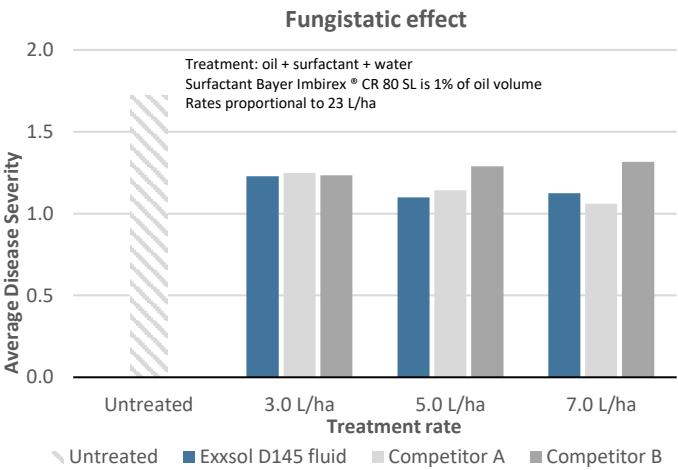

©2024 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking “X” sign, and other product or service names used herein are trademarks of ExxonMobil unless otherwise noted. This document may not be distributed, displayed, copied, or altered without prior written permission from ExxonMobil. If ExxonMobil authorizes distribution, display, or copying of this document, the user must ensure the document remains unaltered and complete, including all headers, footers, disclaimers, and other information. You may not copy or reproduce this document, in whole or in part, on a website. ExxonMobil does not warrant typical (or other) values. The information herein is based on the analysis of representative samples and not the actual product shipped. This information relates only to the product or materials listed and is not applicable in combination with any other product or material. We base the information on data believed to be reliable as of the date compiled, but make no warranties, representations, or guarantees, express or implied, regarding the merchantability, fitness for a particular purpose, non-infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials, or processes described. The user is solely responsible for all determinations regarding any use of the material or product, as well as any process within the scope of its interest. We expressly disclaim any liability for any loss, damage, or injury incurred directly or indirectly as a result of or related to the use of the information contained herein. This document is not a recommendation of any non-ExxonMobil product or process, and we expressly disclaim any implication to the contrary. The terms “we,” “us,” “our,” “ExxonMobil Chemical,” and “ExxonMobil” are used for convenience and may refer to ExxonMobil Chemical Company, Exxon Mobil Corporation, or any directly or indirectly owned subsidiary.