


High performance hand wrap film with incorporated Post-Consumer Recycled (PCR) content



13-layer high-tenacity hand wrap incorporating PCR content

Thickness: 10 µm

- Exceed XP 8784
- Exceed XP 8346
- Vistamaxx 6202
- PCR
- ExxonMobil™ LL1004AY

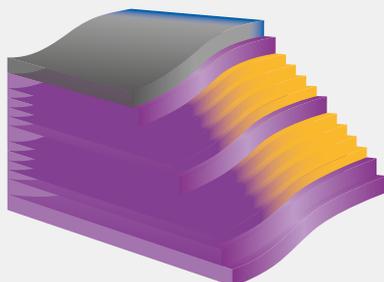

ExxonMobil's performance polymer solutions including Exceed™ XP, Exceed™, and Vistamaxx™ can offer high performing hand wrap films when incorporating PCR content

- High tenacity film with good holding force
- Reduced effect of gels
- Incorporation of 30% PCR content
- Good cling properties

Polymer properties*	LL1004AY	Vistamaxx 6202	Exceed XP8784	Exceed XP8346	Test method (based on)	Unit
Melt index (190°C/2.16 kg)	2.8	9.1	0.8	3.5	ASTM D1238	g/10 min
Density	0.918	0.862	0.914	0.916	ASTM D792	g/cm ³

* For detailed product information, please consult the individual grade data sheet, available on our website: www.exxonmobilchemical.com. Values given are typical and should not be interpreted as specifications. Data generated by or on behalf of ExxonMobil Chemical.

Scan for more information:



ExxonMobil Space: W206AB - West Building Level 2

A new chapter in collaboration

For more information: exxonmobilchemical.com/pe

© 2024 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

SML stretch film line

The cast film process is a highly efficient method of producing top quality stretch wrap film in the high output range. Innovative engineering solutions such as high-speed extruders, different types of winders and features that include coreless winding or modified edges help our customers to establish a successful position in this highly competitive market.

SML offers machines with 3 – 12 up film widths (1,500 mm to 6,000 mm) which can be individually equipped with regard to the number of extruders and layers (from 3 layers up to nanolayer configuration).

Output on the basis of 23 µm film ranges from 900 kg/h to 4,000 kg/h.

The SML W4000-4S stretch film winder handles machine rolls and jumbos on 3" as well as handrolls on 2" using fully automated core and roll handling systems.

Technical specification of a **PowerCast** stretch film line:

Features:	
Net film width:	4,000 mm
Part bobbins:	8 x 500 mm, 9 x 450 mm, 10 x 400 mm
Film structure:	7 / 9 / 11 / 13 or up to 67 nano layers
Extruder configuration:	7 extruders (2 x 90/33D plus 5 x 75/33D)
Film thickness range:	8 – 50 µm
Max. mechanical speed:	850 m/min
Net output:	approx. 2,000 kg/h with 12 µm approx. 3,200 kg/h with 23 µm



SML at NPE
W7289 - West Building Level 2 - Expo Hall
For general information: www.sml.at