

**ExxonMobil**

| Flexible food packaging

Sustainability made easy

**A versatile  
design for recycling**

**A design  
for robustness**

**A design  
for performance**




**Exceed™ XP  
performance PE**

**Exceed™  
performance PE**

**Enable™  
performance PE**

# Flexible food packaging: A versatile design for recycling

## Full PE laminated solution to replace multi-material laminates

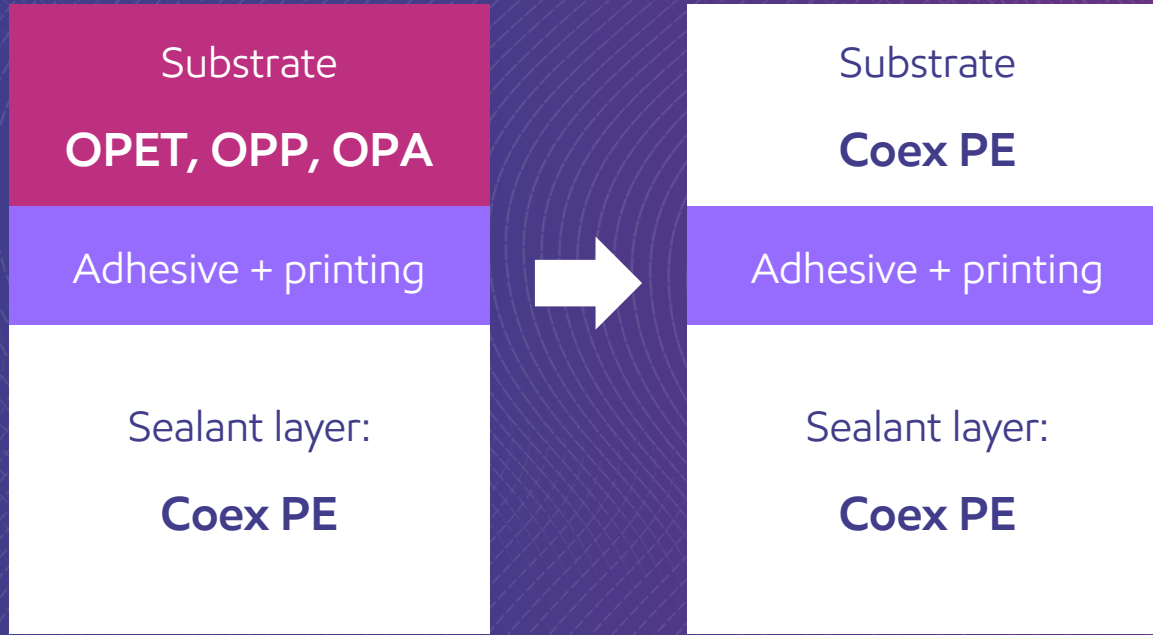



# Flexible food packaging: A versatile design for recycling

	Dry products	Liquid products
With MDO	✓	✓
Without MDO	✓	✓
3 or 5 Layer	✓	✓



# Flexible food packaging: A design for performance





# Flexible food packaging: A design for robustness

**6X**

stretch ratio required  
with HDPE resins

**4.8X**


stretch ratio to achieve  
optimum performance with  
Enable™ performance PE



Decreased risk of  
film breakage

Increased productivity

Reduced product  
wastage

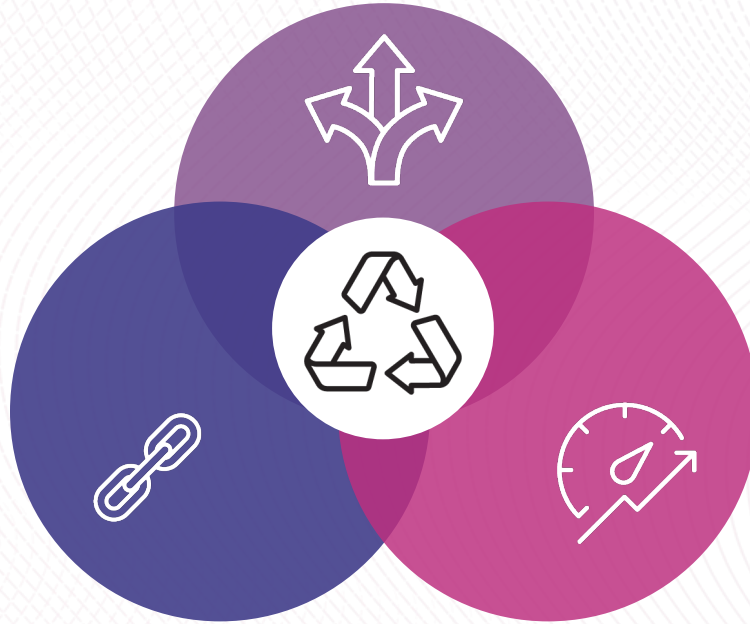

**Versatility**

**Performance**

**Robustness**

---

**Exceed™ XP, Exceed™ and Enable™ performance PE**



©2019 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Chemical" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.