



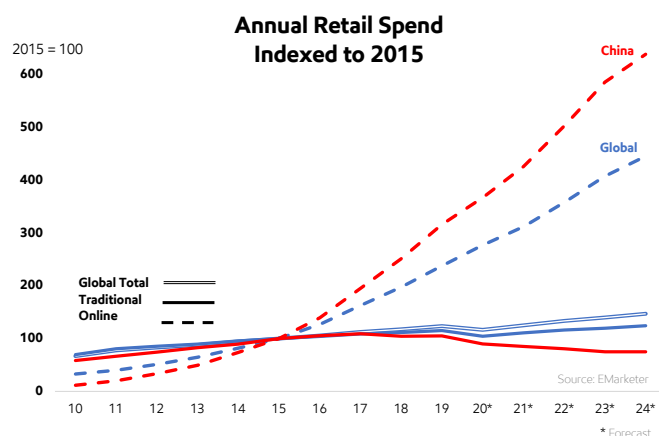


## Global polyethylene market is strong despite COVID-19 headwinds

A strong demand in flexible packaging applications (e.g. food packaging, hygiene and medical applications) has driven global polyethylene demand in the 1st half of 2020 across all regions.

Very strong eCommerce activities also had a major impact on polyethylene demand for packaging applications during the period

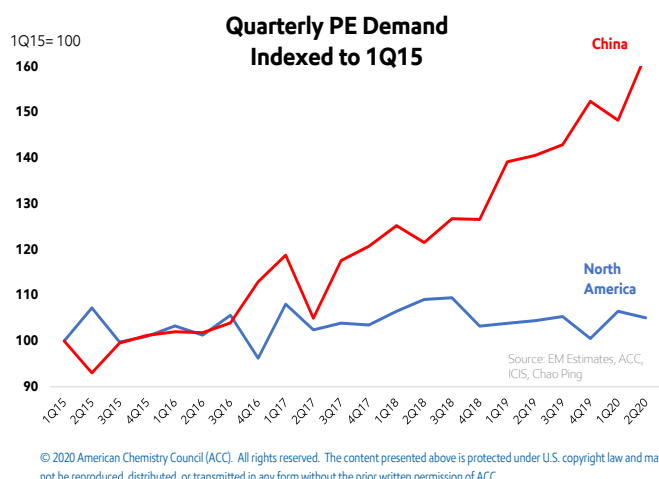

From a supply standpoint, a heavy turn-around season in China and temporary idling of units in North America impacted polyethylene production in the 2nd quarter

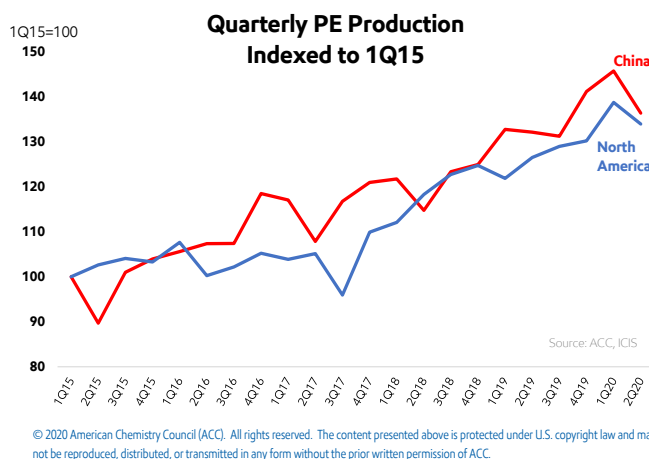

## Solution Insight:

### New Exact™ plastomers designed for high-speed packaging

Exact™ 3236 and Exact™ 3237 are new ethylene hexene copolymers designed for sealant layers of multi-layer films used in high-speed flexible packaging. We believe that the overall balance of attributes is particularly well-suited to all-PE laminates for recyclable\* packaging.


#### Exact™ 3236 delivers

- Sealing comparable to competitive 0.902 g/cm<sup>3</sup> plastomers
- Enhanced stiffness and toughness
- Easy extrusion and film fabrication
- Lower static and kinetic COF on hot metal equipment surfaces

#### Exact™ 3237 delivers

- All of the above with an integral slip and anti-block package

#### Performance in a typical 3-layer lamination sealing film

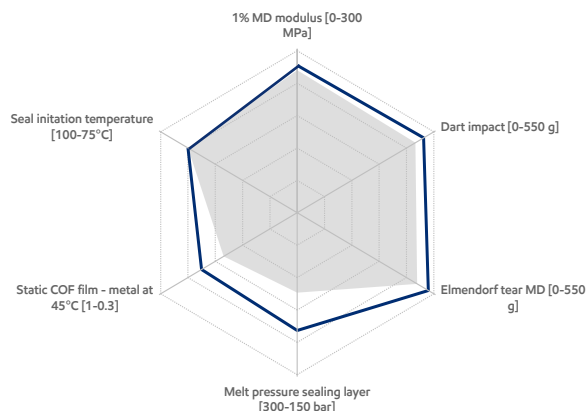


\*Recyclable in those communities where appropriate collection and recycling facilities exist.

Blue line is Exact 3236 film  
Gray shaded area is a competitive 0.902 g/cm<sup>3</sup> plastomer film

## Interested in learning more?

Please ask us for additional details and information!

## Contact Us



[exxonmobilchemical.com/pe](https://exxonmobilchemical.com/pe)

## Follow us:



@XOM\_chemical



[linkedin.com/showcase/exxonmobil-chemical](https://linkedin.com/showcase/exxonmobil-chemical)



Note: You must have Wechat app installed

©2019 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Chemical" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

Contact us for more information:

[exxonmobilchemical.com/pe](https://exxonmobilchemical.com/pe)

**ExxonMobil**

Energy lives here™