




Exceed™ Tough+ Exxtra™ Seal ExxonMobil™

Low temperature sealing cast film solution with outstanding packaging integrity

 Low sealing initial temperature	 High hot tack strength	 Excellent dart impact	 High TD tear strength
--	--	---	---


Polymer properties	Exceed™ Tough+ m 1415	Exxtra™ Seal POP 2008.MK	ExxonMobil™ C4LL 2018	ExxonMobil™ LD2025.BR	Test method* (based on)	Unit
Melt Index (190 °C/2.16 kg)	1.4	2.0	2.0	2.0	ASTM D1238	g/10 min
Density	0.915	0.908	0.918	0.923**	ASTM D792	g/cm ³

* For detailed product information, please consult the individual grade data sheet, available on our website: www.exxonmobilchemical.com. Values given are typical and should not be interpreted as specifications. Data generated by or on behalf of ExxonMobil Product Solutions.

** Test method based on ASTM D1505.

Thickness: 60 µm

- Exceed™ Tough+ m 1415
- Exxtra™ Seal POP 2008.MK
- ExxonMobil™ C4LL 2018
- ExxonMobil™ LD2025.BW
- AB/Slip MB

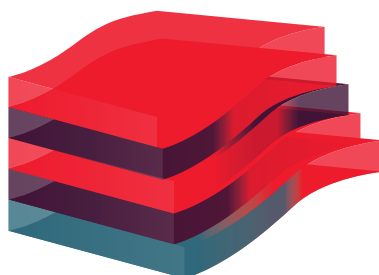

Scan for more information

For more information: exxonmobilchemical.com/pe

What's new: ExxonMobil Signature Polymers

All our polymers are now positioned under a single portfolio brand: Signature Polymers. The aim is to simplify our product architecture and naming to improve portfolio navigation for you. We would like to stress that our commitment to high quality products remains the same. The composition of the products remains the same, it is the names that change. We will be making these modifications over the next few months, through mid 2025, so you will see both old and new grade names highlighted during that time. Here's a quick overview of brands and grade names that have changed in this document:

Legacy Commercial Name	New Commercial Name
Exact™ 3237	Exxtra™ Seal POP 2008.MK
ExxonMobil™ LLDPE LL1002	ExxonMobil™ C4LL 2018
ExxonMobil™ LD2025.BW	ExxonMobil™ LD 2025.BW

Want to see what's changed in our portfolio?
Go to exxonmobilchemical.com/sprtransform



Multi-layer co-extrusion cast line



Model: SC/CPE- Φ 90/ Φ 75/ Φ 90/ Φ 75/ Φ 90-2800mm

Machine specifications:

Structure:	A/B/C/D/E
Product thickness:	0.03-0.12 mm
Max lay flat width:	2500 mm
Max rolls diameter:	1000 mm
Output:	3000 Ton/year
Max line speed:	150 m/min

