



Exceed™ Tough+

Exceed™ Flow+

Exxtra™ Seal

Full* PE thermoformed packaging that can offer recyclability** and uncompromising package functionality and optics



Recyclable*




Exceptional
puncture
performance



Excellent
optics



Optimized
formability



High O₂
barrier

Data and results presented herein apply specifically to the noted application under this fact sheet. Your results may differ depending on factors such as operating conditions, equipment and materials used.


Challenge

To produce a recyclable, thermoformed package with 95 wt% PE content without compromising on functionality or optics.

Top web

Thickness: 75µm


- Exceed™ Tough+ m 0512.ML
- Exxtra™ Seal m 2012.MA
- EVAL™ L171B
- Slip & AB Masterbatch
- Tie resin



Thermoformed bottom web

Thickness: 170µm

- Exceed Tough+ m 0512.ML
- Exxtra Seal m 2012.MA
- Exceed™ Flow+ m 0938.MC
- EVAL™ LT172B
- Slip & AB Masterbatch
- Tie resin



*95% PE based on weight.

**Recyclable in the few communities with programs and facilities in place that collect and recycle plastic film.

kuraray

EVAL™

MULTIVAC

Reifenhäuser
BLOWN FILM

Solution

Creation of a 95 wt% PE thermoformed package, consisting of a formed PE/EVOH bottom web and PE/EVOH lid film-with both high oxygen barrier and outstanding package integrity through optimized corner thickness and puncture.

The bottom web was produced with ExxonMobil best-in-class resins like Exceed™ Tough+, Exceed™ Flow+ and Exxtra™ Seal performance PE and a special EVAL™ EVOH resin for thermoforming. The films were made on a Reifenhäuser Aqua Cool 9-layer barrier line.


ExxonMobil resins, Exceed Tough+ m 0512.ML and Exceed Flow+ m 0938.MC provide exceptional puncture performance and formability, while the EVAL™ EVOH resin LT172B designed for thermoforming, combines low thickness with high barrier properties.

The top film consists of a PE/EVOH coex film produced on a Reifenhäuser Aqua Cool 9-layer barrier line with Exceed Tough+ m 0512.ML, Exxtra Seal m 2012.MA and EVAL™ EVOH high barrier resin L171B.

The combination of Reifenhäuser's Aqua Cool technology and ExxonMobil's high performance resins can result in excellent optics, exceptional puncture performance and formability.

The package was then formed and filled on a MULTIVAC R126 machine according to industry standard process conditions.


The package was also successfully produced on a MULTIVAC R245 machine at high line speed.

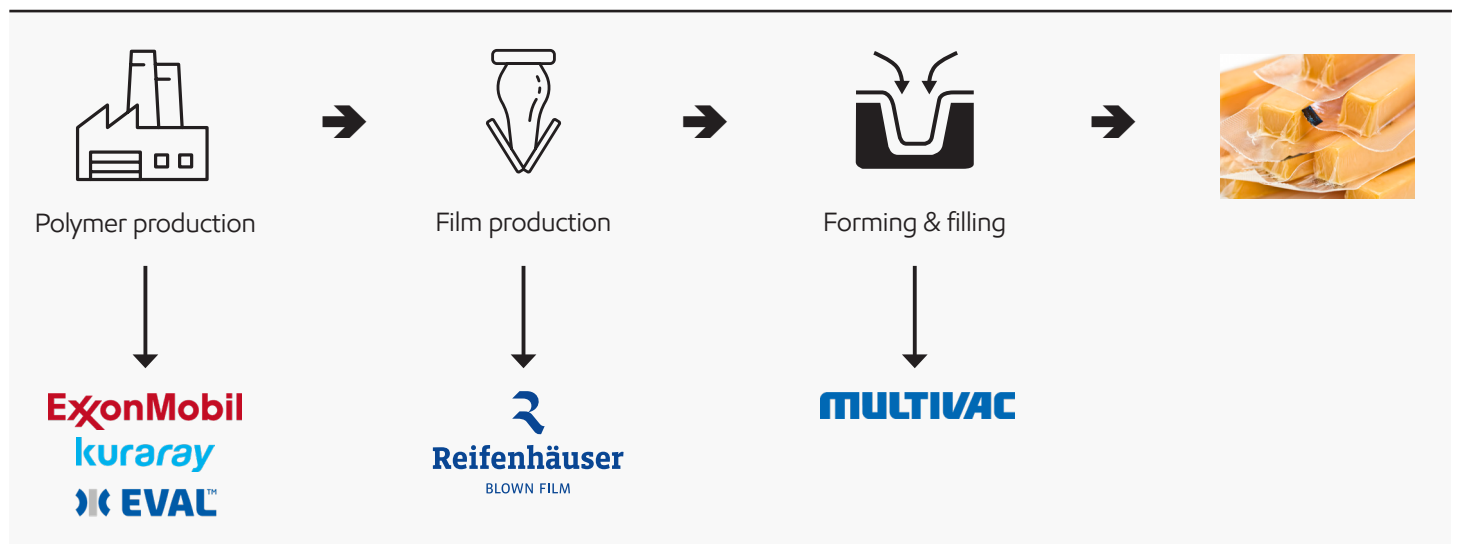


Result

The combination of Exceed Tough+, Exceed Flow+ & Exxtra Seal performance PE and EVAL™ EVOH resins can deliver outstanding package integrity, with comparable film stiffness and exceptional puncture performance compared to PA containing thermoformed film. Package functionality such as oxygen barrier and optics are comparable to PA containing thermoformed films.

The film has excellent machinability on the MULTIVAC R245 forming and filling machine at standard and high line speed. Under optimized thermoforming trial conditions (*) on the R245 MULTIVAC line, maximum line speed (>12 cycles/minute) was achieved.

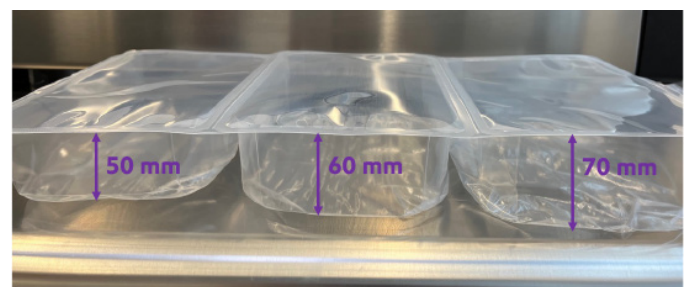

(*) Sealing: 1 second at 120°C with 3 bar, forming: 2.3 seconds at 100°C, mold size: 182mm x 112mm, with depths of 50mm, 60mm and 70mm.

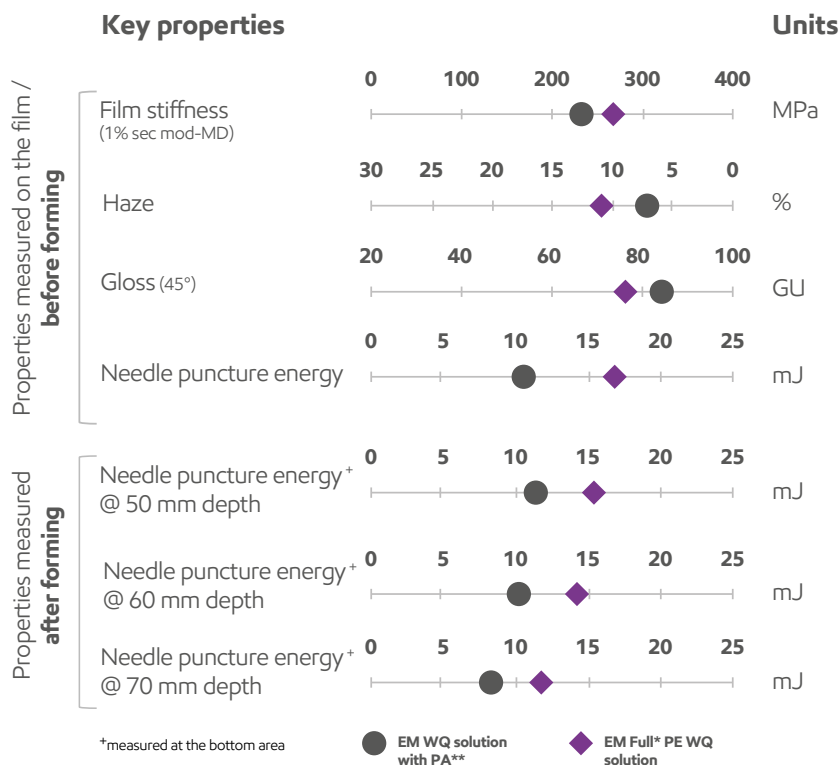

Full* PE solution with Exceed™ Tough+ m 0512. ML, Exxtra™ Seal m 2012.MA & Exceed™ Flow+ m 0938.MC vs. PA containing WQ solution, both 170 µm films can offer:

- Comparable film stiffness and optics
- Step increase in puncture performance before and after forming

* 95% PE based on weight.

**PE/PE/PE/Tie/PA/EVOH/PA/Tie/PE with thickness distribution: 46/10/10/7/10/10/46/6/25.

Both 170 µm films have OTR below 0.5 cc/(m².day) and WVTR below 3 g/(m².day).

WQ: Aqua Cool water-quench

EM: ExxonMobil

PA: polyamide

Data from tests performed by or on behalf of ExxonMobil on representative samples.

The combination of Exceed Tough+, Exceed Flow+ & Exxtra Seal performance polymers and EVAL™ EVOH with Reifenhäuser's Aqua Cool technology, allows you to create a 95 wt% PE-based thermoformed package, without compromising on package integrity, optics or machinability.

We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest.

Test item	Test method
Tensile properties on film at room temperature	ExxonMobil test method
Gloss 45°	ExxonMobil test method
Haze	ExxonMobil test method
Oxygen transmission rate (OTR)	ExxonMobil test method (measured at 23°C, 50% RH of the test gas)
Water vapor transmission rate (WVTR)	ExxonMobil test method (measured at 37.8°C, 90% RH of the test gas)
Needle puncture resistance	ExxonMobil test method

Contact us for more information: exxonmobilchemical.com/pe

ExxonMobil
Signature Polymers

Bring your impossible



©2025 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

What’s new: ExxonMobil Signature Polymers

All our polymers are now positioned under a single portfolio brand: Signature Polymers. The aim is to simplify our product architecture and naming to improve portfolio navigation for you. We would like to stress that our commitment to high quality products remains the same, it is the names that change. Everything else remains the same. We will be making these modifications over the next six months so you will see both old and new grade names highlighted during that time.

Here’s a quick overview of brands and grade names that have changed in this document:

Legacy commercial name	New commercial name
Exceed™ XP 7052ML	Exceed™ Tough+ m 0512.ML
Exceed™ 2012MA	Exxtra™ Seal m 2012.MA
Enable™ 4009MC	Exceed™ Flow+ m 0938.MC

Some of our existing Exceed, Achieve, Paxon and premium PP/HD grades have moved to Exceed brand; most existing Enable grades have moved to Exceed Flow[+]; most of our existing Exceed XP grades have moved to Exceed Tough[+]; most of our existing Exceed S grades have moved to Exceed Stiff[+]. More details here https://www.exxonmobilchemical.com/en/brands/signature-polymers/exceed_high_performance_polymers or contact your ExxonMobil representative to know more.

Want to see what’s changed in our portfolio? Go to [exxonmobilchemical.com/sptransform](https://www.exxonmobilchemical.com/sptransform)