




Exceed™ Tough+ Exxtra™ Seal


Heavy-duty sack films incorporating 50% recycled content maintain performance



Incorporation
of recycled
content



Film
integrity



Bag drop
performance



Easy
processability

Data and results presented herein apply specifically to the noted application under this fact sheet. Your results may differ depending on factors such as operating conditions, equipment and materials used.

Challenge

Help promote plastics circularity by developing heavy-duty sack (HDS) films incorporating recycled content, while maintaining mechanical properties and thickness

The Selene Group, a leading polyethylene (PE) film converter and recycler based in Italy, wanted to develop heavy-duty sack films (Selene NextBag™) incorporating 50% recycled content (Selene Premium Recycle Polymer) in response to brand owner commitments, consumer feedback, and regulatory changes.

“As a converting and recycling company, we can help the value chain respond to evolving sustainability needs by including recycled material in our solutions,” said Luca Massari, R&D Manager, Selene. “We need to ensure that the heavy-duty sacks fulfill their primary function of protecting and transporting products effectively, maintaining the mechanical properties and thickness of the film. Plus, the end user’s machine settings, such as sealing bars temperature and output, should not need to change, so that it’s an easy solution to adopt.”



Pallets with Selene NextBag HDS which incorporate 50% recycled content passed acceleration tests at ESTL, according to EUMOS40509.


Solution

Incorporate 50% recycled content with Exceed™ Tough+ and Exxtra™ Seal performance PE polymers for high-integrity heavy-duty sacks

ExxonMobil and Selene worked together to test formulations for heavy-duty sack films incorporating 50% high-quality recycled content combined with Exceed Tough+ and Exxtra Seal performance PE polymers which can help boost performance. The recycled content is sourced from a logistics center where resin bags are opened and then emptied to fill bulk trucks. The waste bags are sorted, washed, de-inked, and re-pelletized by Selene into a premium recycled product. A thorough risk assessment of the final resin bag material is conducted by Selene to confirm product safety for the intended use.

The inclusion of Exceed™ Tough+ m 1019 in the formulation helps deliver excellent toughness to the heavy-duty sack films, compensating for possible degradation in the properties of the recyclate. The inclusion of Exxtra™ Seal m 1012 increases bag drop resistance and enhances sealing performance.

“Compliance to fulfill regulatory obligations and safety assurance for the intended use are key focus areas,” said Klaus Urbano, Sales Director, Selene. “We undertake a rigorous process to ensure the recyclate is a consistent high quality. Recycling material traceability and adequacy are confirmed by the appropriate documentation.”

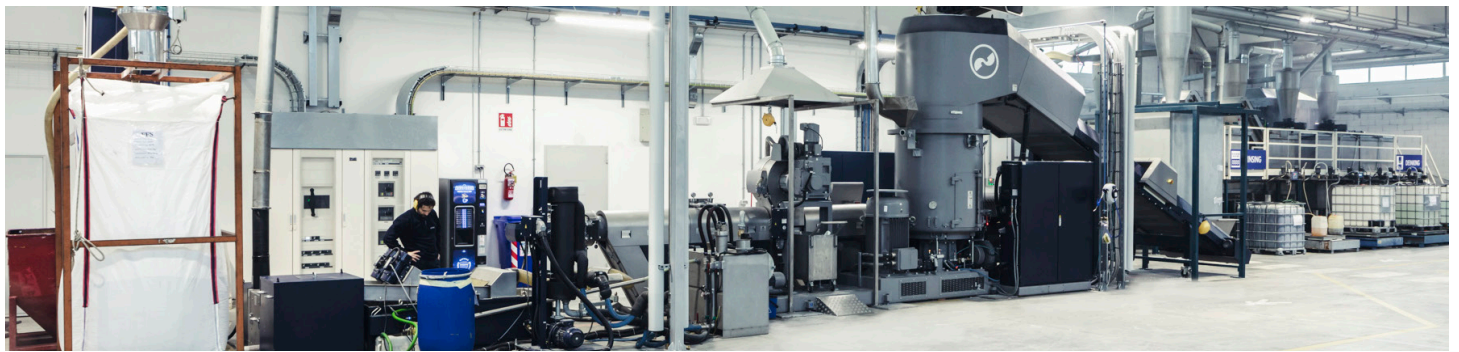

The recycling line at the Santa-Margherita plant, Italy where bags are sorted, washed, de-inked, and re-pelletized into a premium recycled product.


Results

High-integrity heavy-duty sacks incorporating 50% recycled content that are easy to process

NextBag™ by Selene incorporates Exxtra Seal and Exceed Tough+ performance PE polymers and can deliver:

- A solution incorporating 50% recycled content.
- Mechanical properties in line with industry standards for high-integrity sacks
- Bag drop performance that outperforms reference virgin PE formulations
- Creep resistance and pallet stability: pallets passed acceleration tests according to EUMOS40509
- No foreseeable operational changes to the end-user's bagging machine settings (sealing bars temperature, output)

“The solution fulfills demand for a sustainable approach to flexible film applications by introducing recycled content,” said Marco Rubertà, Technical Director, Selene. “The use of recycled plastic in other flexible packaging films is gaining traction in Europe, and we are experiencing considerable interest from the value chain.”

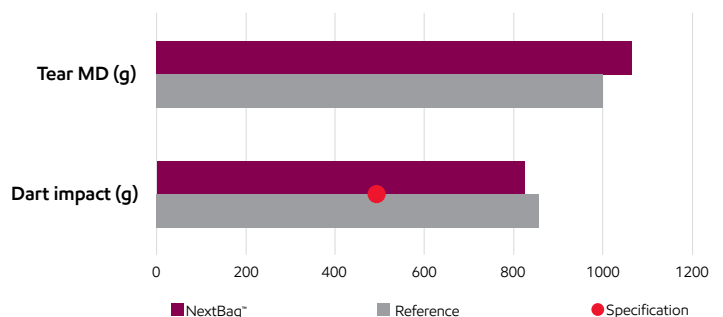

The dart impact and tear MD properties of the HDS which incorporate 50% recycled content (NextBag) and Exceed™ Tough+ m 1019 are similar to the virgin reference at the same thickness (125mic).

Data from tests performed by or on behalf of ExxonMobil.

Contact us for more information: exxonmobilchemical.com/pe

ExxonMobil
Signature Polymers

Bring your impossible



©2025 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

What's new: ExxonMobil Signature Polymers

All our polymers are now positioned under a single portfolio brand: Signature Polymers. The aim is to simplify our product architecture and naming to improve portfolio navigation for you. We would like to stress that our commitment to high quality products remains the same, it is the names that change. Everything else remains the same. We will be making these modifications over the next six months so you will see both old and new grade names highlighted during that time.

Here's a quick overview of brands and grade names that have changed in this document:

Legacy commercial name	New commercial name
Exceed™ XP 8318	Exceed™ Tough+ m 1019
Exceed™ 1012	Exxtra™ Seal m 1012

Some of our existing Exceed, Achieve, Paxon and premium PP/HD grades have moved to Exceed brand; most existing Enable grades have moved to Exceed Flow[+]; most of our existing Exceed XP grades have moved to Exceed Tough[+]; most of our existing Exceed S grades have moved to Exceed Stiff[+]. More details here https://www.exxonmobilchemical.com/en/brands/signature-polymers/exceed_high_performance_polymers or contact your ExxonMobil representative to know more.

Want to see what's changed in our portfolio? Go to [exxonmobilchemical.com/sptransform](https://www.exxonmobilchemical.com/sptransform)