



## Vistamaxx™ performance polymers

# Singapore Metalocene Elastomer (SME) plant storage, product packaging for LVV products

SME supplies Vistamaxx™ performance polymers in 25 kg (55 lbs) FFS bags.

Vistamaxx performance polymers are a family of low density, semi-crystalline polyolefins whose softening point is lower than traditional polyolefins such as polyethylene and polypropylene. Vistamaxx performance polymers are inherently stable, although some minor changes to product appearance, physical or chemical characteristics may occur after prolonged storage.

## Storage guide

In order to maintain consistent product quality until usage, it is recommended that customers observe this guide for product received in ExxonMobil original packaging.

- Do not remove outer packaging from pallets until ready for use.
- Store product at moderate temperatures, not exceeding 40°C.
- Ensure pneumatic transportation air is maintained below 40°C throughout the pellet conveying system.
- Store product indoors at all times and protect exposed pellets from direct sunlight to prevent potential damage from uv light over time.
- Protect product from water and other contaminants.
- Consume product within four (4) years of the manufacturing date as a best practice, unless otherwise advised.
- Stacking of any Vistamaxx grades is not recommended. Any stacking is done at the customer's own risk.

## Product packaging guide

### FFS bags specifications

- Form fill seal (FFS) bags
- Number of bags per pallet: 50
- Layers per pallet: 10
- Height (typical): 1.8 m (71")
- Net product wt: 1.25 MT (2,760 lbs)
- Covering: stretch hood
- Water barrier film between product and pallet


FFS pallet specification: 1.1 m x 1.3 m (44" x 52")  
ISPM 15 certified heat treatment

## SME lot number format

### Lot nomenclature

- The manufacturing date is available from the lot number
- The lot number is printed on each packaging bag
- The lot number is unique for each production batch and provides for full traceability

### Example of lot details

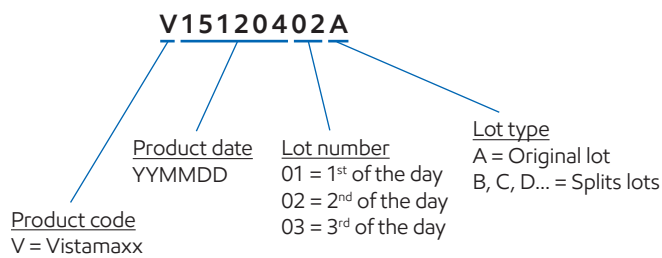

## What's new: ExxonMobil Signature Polymers

All our polymers are now positioned under a single portfolio brand: Signature Polymers. The aim is to simplify our product architecture and naming to improve portfolio navigation for you. We would like to stress that our commitment to high quality products remains the same, it is names that change. Grade slate of Vistamaxx™ performance polymers will keep unchanged.

Want to see what's changed in our portfolio? Go to [exxonmobilchemical.com/sptransform](https://exxonmobilchemical.com/sptransform)

Contact us for more information: [exxonmobilchemical.com/vistamaxx](https://exxonmobilchemical.com/vistamaxx)

**ExxonMobil**  
*Signature Polymers*

**Bring your impossible**



©2016–2025 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking “X” device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil’s prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms “we,” “our,” “ExxonMobil Product Solutions” and “ExxonMobil” are each used for convenience, and may include any one or more of ExxonMobil Product Solutions, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded. V1119-177E49