

Exact™ polyolefin elastomers

Strengthened by collaboration: ExxonMobil and Milliken offer enhanced performance polypropylene compounds incorporating recycled content that can meet automotive material standards

Challenge

Over the past few years, the successful use of recycled polypropylene (rPP) content in non-critical auto parts has helped drive automotive original equipment manufacturers (OEMs) to turn their attention to high-performance functional parts.

OEMs have interest in rPP compounds that can meet application requirements for impact resistance at various temperatures and stiffness benchmarks. Those compounds must also be designed for fast injection molding cycle times which can help address cost concerns.

This ask seems reasonable, but the reality is that this is not easily achieved: both post-industrial and post-consumer rPP content, even when originating from end-of-life vehicle waste, typically struggles to meet such demanding automotive OEM specifications.

Solution

Milliken & Company and ExxonMobil have a long history of working together. As a leading supplier of transformative chemical solutions that deliver essential performance, Milliken routinely helps brands and converters balance and enhance the properties and processability of mechanically recycled polypropylene content. ExxonMobil manages a portfolio of performance products that can provide the building blocks to help meet growing global demand for essential products.

Critical automotive OEM parts, such as front fascia deflectors, must meet flexural modulus (stiffness), tensile strength, and impact strength specifications, so formulations that incorporate rPP content would have to meet these physical property requirements without compromising final performance or negatively impacting the injection-molding process.

Each company brought a unique skill set to help address the challenge. The companies developed trial formulations built around Milliken's DeltaMax® performance modifiers and ExxonMobil's Exact™ polyolefin elastomers (POE). The technical team conducted seven compounding trials using up to 25% Exact POE enhanced with DeltaMax® and post-consumer rPP content containing approximately ~15% polyethylene.

The seven test compounds were molded into dumbbell-shaped samples, which were then tested for flexural modulus, tensile strength, impact strength at 23 °C and at -20 °C, and for melt flow rate (MFR).


Results

The test results showed that Notched Charpy impact of 50 kJ/m² at 23°C and 4 kJ/m² at -20°C could be achieved with a flexural modulus of approximately 900 MPa and a tensile strength significantly above the target — passing the first hurdle of balancing mechanical performance. The MFR was improved more than two-fold over the initial rPP content compound, which has the potential to help reduce part processing costs by decreasing operating temperature and lowering cycle time which can lead to lower energy consumption in the manufacturing process and a lower carbon footprint of the final part.

These results come from the innovative formulation enabled by Milliken and ExxonMobil's collaboration:

- The rubber-like behavior of Exact™ POE can help improve impact strength and can help limit drops in stiffness compared to virgin recycled PP.
- DeltaMax® performance modifiers can help improve flow rate and help boost impact further over recycled PP with Exact POE through compatibilization of the matrix-rubber interface, thus helping to facilitate particle dispersion and small particle size.

"We harnessed the synergy between Exact polyolefin elastomers and DeltaMax® to help enable the development of critical automotive parts that incorporate post-consumer rPP content," shared Dr. Philippe Scheerlinck, Senior Market Development Manager for Milliken's Chemical Business. "The creation of viable compounds that incorporate rPP content is a major win, and we're proud to play a role in solving this challenge together with our collaborators at ExxonMobil."

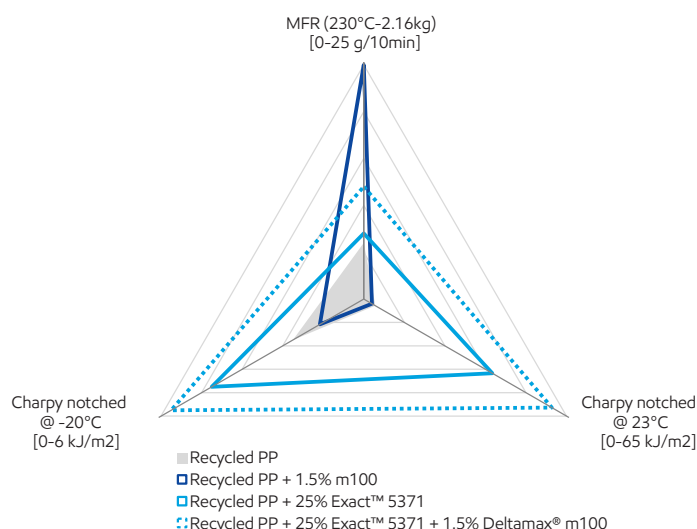

Data from tests performed by or on behalf of ExxonMobil

"Collaboration between Milliken and ExxonMobil is key to helping unlock the opportunities of developing automotive parts that incorporate post-consumer rPP," said J. Dow, Global Market Development Manager at ExxonMobil. "Creative solutions that can help boost the performance of PP compounds that incorporate post-consumer rPP are highly desired by automotive OEMs as they can help the OEMs meet their sustainability goal of increasing the incorporation of recycled content in their products."

ExxonMobil
Signature Polymers

Bring your impossible

ExxonMobil Signature Polymers was born from the belief that people fuel progress. From automotive and construction to packaging, agriculture, industrial, and beyond, we leverage the scale and reach of ExxonMobil to deliver the insights and innovations that empower our diverse, global partners to take their businesses to new heights. We continuously work to provide the listen-first, service-driven, game-changing collaboration that unlocks opportunities for our partners and advances business goals.



© 2025 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

What's new: **ExxonMobil Signature Polymers**

All our polymers are now positioned under a single portfolio brand: ExxonMobil Signature Polymers. The aim is to simplify our product architecture and naming to improve portfolio navigation for you. We would like to stress that our commitment to high quality products remains the same, it is names that change. Grade slate of Exact™ polyolefin elastomers will keep unchanged.

Want to see what's changed in our portfolio? Go to exxonmobilchemical.com/sptransform