

# Jayflex™ plasticizers for advantaged performance

Energy lives here™



**Why Jayflex DINP and DIDP plasticizers?**  
Jayflex DINP and DIDP are di-esters with a chemical structure providing an optimum balance between polar and non-polar groups. Key characteristics of the plasticizer are very slow diffusion and outstanding permanence derived from two high molecular weight branched alcohol chains.

## Key advantages

- Track record of safe use
- High molecular weight
- Good pre-gelation and fusion characteristics
- Good low temperature properties
- Favorable cost performance
- Excellent compatibility with PVC
- Globally available
- Suited to variety of processing techniques

## Safe and registered under REACH


Not only are Jayflex DINP and DIDP registered under REACH, but following extensive evaluations between 2009 and 2013 the EU concluded DINP and DIDP are safe for use in all current applications with no further risks identified\*.

## Volatile losses


The rate of volatile loss of a plasticizer from PVC is controlled by diffusion to and evaporation from the surface. Rates of plasticizer losses can be anticipated from the neat plasticizer weight loss. Jayflex DINP and DIDP offer a high level of permanency compared to terephthalates or cyclohexanoates. Alternative plasticizers such as adipates, di-benzoates or citrates are substantially more volatile than Jayflex DINP and DIDP.

\*DINP and DIDP are restricted in the EU based on precautionary grounds in toys and childcare articles which can be placed in the mouth.

Neat plasticizer weight loss %  
(24h at 155°C - FV \*)

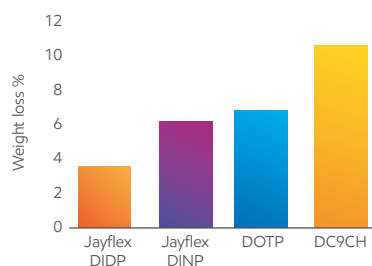

Neat plasticizer weight loss %  
(24h at 155°C - FV \*)

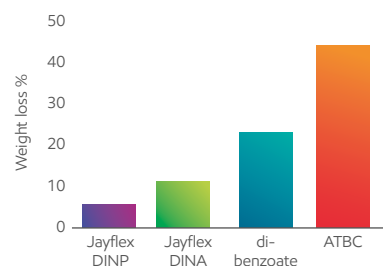

\* ExxonMobil test method  
DC9CH: 1,2-cyclohexane di-carboxylic acid di-isononyl ester  
DOTP: di-2-(ethylhexyl) terephthalate  
ATBC: acetyl tributyl citrate  
Di-benzoate: mixture of di-propylene, di-ethylene and tri-ethylene glycol di-benzoate



Download the Plasticizer App  
Learn more at [plasticizerfacts.com](http://plasticizerfacts.com)

### Improved flexible PVC processing

A low solution temperature indicates that dry blends can form at a relatively low temperature, will occur faster at a set temperature or that plastisols will gel and fuse at a lower temperature. It also indicates that the plasticizer is tolerant of the use of secondary plasticizers.

Jayflex DINP and DIDP plasticizers help to better achieve the key stages of flexible PVC processing, such as dryblending, full fusion and development of optimum mechanical properties.

### Good plastisol pre-gelation and fusion

When processing plastisols, the gelling energy is worked only by heat transfer. The higher the plasticizer solution temperature, the higher the processing temperature or the longer the time needed to achieve plastisol gelation. The rate of plastisol viscosity increases with the temperature is an indication of the solvency power of the plasticizer and its ease of processing. Jayflex DINP is faster gelling than most alternative plasticizers.

### Easy plastisol processing


Plastisol rheology gives an indication of the ease of processing when evaluated at the shear rate of the process. Plastisol viscosity increases with plasticizer neat viscosity and plasticizer solvency power. Poor gelling plasticizers impart lower plastisol viscosities but require higher processing temperature. Jayflex DINP offers an ideal compromise and good viscosity stability over time.

### Optimum solution temperature (T)

	Jayflex DINP	Jayflex DIDP	DOTP	ATBC	DC9CH
Solution T °C *	127	132	139	138	144


ExxonMobil test method - PTM 7 - Source file: data on neat properties

### Gelation curve - storage modulus as a function of temperature

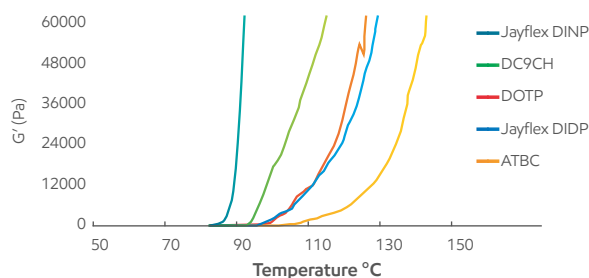

ExxonMobil test method - Formulation - Solvin 382NG 100 phr, Plasticizer 60 phr, Stab 1 phr.

### Plastisol viscosity as a function of shear rate (s-1) after a day

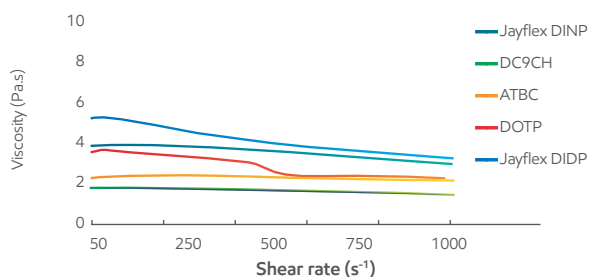

ExxonMobil test method - Formulation - Solvin 382NG 100 phr, Plasticizer 60 phr, Stab 1 phr.




## High permanency and low volatile losses

Resistance to volatile loss from the end product under service conditions constitutes a key factor for plasticizer selection. For most flexible applications, in-service plasticizer evaporation is the essential parameter that drives finished product durability. Jayflex DINP and DIDP plasticizers exhibit the lowest level of volatile losses and therefore the highest level of permanency.


Maximum weight loss or change of mechanical properties (stress at break, elongation at break) before and after aging determines the suitability of compounds for wire and cable. Jayflex DINP and DIDP plasticizers help compounds reach the highest levels of retained properties after aging.

## Compound weight losses

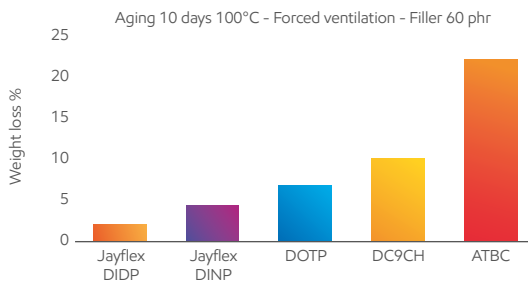


ExxonMobil test method - Formulation - Solvin 271PC 100 phr, Plasticizer (DINP 53 phr, others at efficiency), CaCO<sub>3</sub> EXH1 60 phr, Baeropan MC8656K-A-ST 5 phr

## Compound aging in 10 days at 100°C

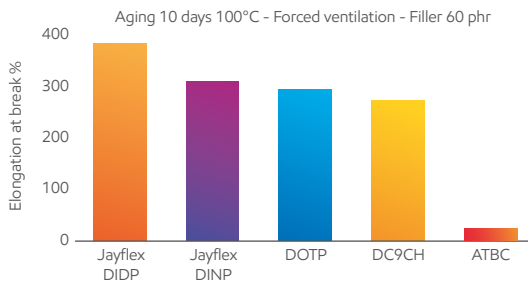


ExxonMobil test method - Formulation - Solvin 271PC 100 phr, Plasticizer (DINP 53 phr, others at efficiency), CaCO<sub>3</sub> EXH1 60 phr, Baeropan MC8656K-A-ST 5 phr

## Compound aging in 7 days at 121°C

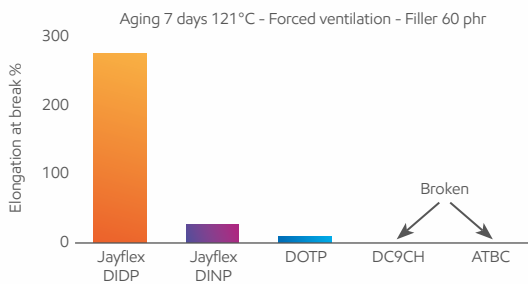

ExxonMobil test method - Formulation - Solvin 271PC 100 phr, Plasticizer (DINP 53 phr, others at efficiency), CaCO<sub>3</sub> EXH1 60 phr, Baeropan MC8656K-A-ST 5 phr




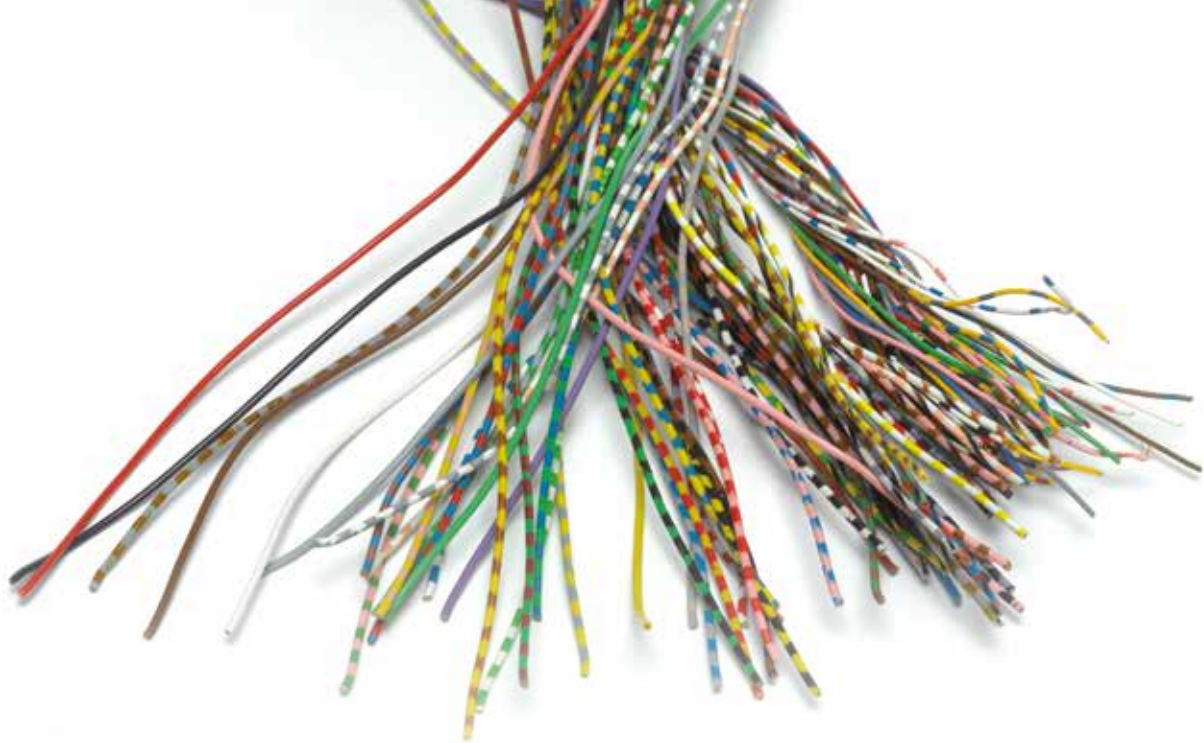

### Good low-temperature performance

At equivalent hardness, Jayflex DIDP plasticizer provides improved low-temperature properties, retained over time, as shown in the accelerated aging study.

### Cold flexibility

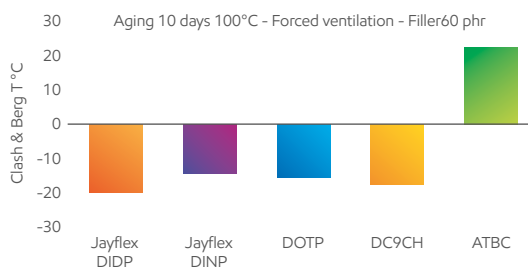

ExxonMobil test method - Formulation - Solvin 271PC 100 phr Plasticizer (DINP 53 phr, others at efficiency), CaCO<sub>3</sub> EXH1 60 phr; Baeropan MC8656K-A-ST 5 phr

### Low fogging for automotive applications

Evaporation of plasticizers from car interior components can contribute to fogging. Typical automotive requirements call for neat plasticizer fogging condensates (16 h/100°C) - DIN 75201 B) below 1 mg. Only Jayflex DIDP plasticizer meets this requirement.

### Low fogging for automotive applications

	Jayflex DIDP	Jayflex DINP	DOTP	ATBC	DC9CH
Fogging value (mg)*	0.7	1.3	2.8	21	3.6

ExxonMobil test method - neat plasticizer fogging

### Flexibility at the lowest cost

Jayflex DINP and DIDP plasticizers combine low density and efficiency for maximum volume cost advantage.

### Acceptable plasticizer efficiency level

	Jayflex DIDP	Jayflex DINP	DOTP	ATBC	DC9CH
Substitution factor *	1.10	1.06	1.03	1.01	1.09


\* Calculated using ExxonMobil test method and literature.  
How to apply efficiency factors: concentration of Plasticizer 2 = concentration of Plasticizer 1 \* substitution factor Plasticizer 2 / substitution factor Plasticizer 1

## More volume with less weight

Each ton of a low-density plasticizer like Jayflex DINP or DIDP translates into high volume of finished product or a lower cost per unit volume.

$$\frac{\text{price}}{\text{volume}} = \frac{\text{price}}{\text{weight}} \times \text{density}$$

## Volume of 1MT based on plasticizer density

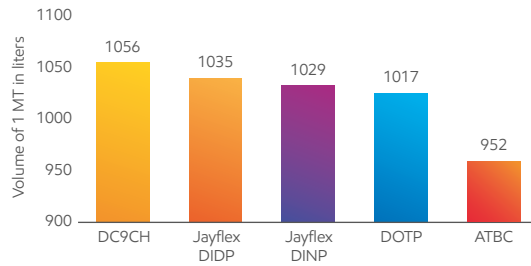

## Excellent compatibility with PVC

Compatibility of a plasticizer can be defined as the level of incorporation in PVC above which it will exude or sweat from the surface of a fully processed compound. The loop test (ASTM D3291-74) observes plasticizer compatibility with PVC during compression and while under tensile stress. Jayflex DINP and DIDP exhibit better compatibility over terephthalates and cyclohexanoates.

## PVC compatibility

Plasticizers	Loop test (ASTM modified) 7 days	ICT Loop test 7 days
Jayflex DINP (53 phr)	0	0
Jayflex DIDP (55 phr)	0	0
DOTP (54 phr)	3	1
ATBC (50 phr)	0	0
DC9CH (55 phr)	0.5	0

Visual assessment: 0 = no exudation, 0.5 = little spots, 1 = slight exudate, 1.5 = slight exudate and small spots, 2 = moderate exudation and small spots, 2.5 = drops but area not saturated, 3 heavy exudation and total area saturated by a continuous film or big droplets.  
ExxonMobil test method  
Formulation - Solvin 271GC 100 phr, Plasticizer as shown, CACO3 80 phr, stabilizer BAZn 2.5 phr

## Good extraction resistance

Jayflex DINP and DIDP plasticizers exhibit similar resistance to extraction versus alternatives but due to lower volatility will show lower losses over time, and longer product life.

## Migration in food stimulant in mg/kg food - 10 days at 40°C

	Jayflex DIDP	Jayflex DINP	DOTP	ATBC	DOA	DC9CH
Distilled water	< 0.2	< 0.2	< 0.2	4	< 0.2	< 0.2
3% Acetic acid	< 0.2	< 0.2	< 0.2	3	< 0.2	< 0.2
10% Ethanol	< 0.2	< 0.2	< 0.2	6	0.7	< 0.2
95% Ethanol	5875	-	-	-	12625	7875

ExxonMobil test method



## Globally available

The prime requirement for any raw material is sustainable production volumes. Jayflex DINP and DIDP plasticizers are produced in large quantities and available throughout the Asia Pacific region, Europe and the Americas.

## Sustainable development

ExxonMobil Chemical supports the development of thorough Life Cycle Assessment and Life Cycle Inventory processes to drive product improvement for sustainable development. ExxonMobil Chemical is committed to support and contribute to efforts aimed at evaluating materials over "cradle-to-grave" life cycles.

## REACH registration numbers

Jayflex DINP plasticizer is registered under 01-2119432682-41-0000

Jayflex DIDP plasticizer is registered under 01-2119422347-43-0000



## True general-purpose plasticizers

Jayflex DINP and DIDP show superior performance in the key requirements for a general purpose plasticizer. Jayflex plasticizers exhibit low volatile losses and high gelation, are cost competitive, are available globally and have a longstanding record of safety in use and wide toxicological review.



**Download the Plasticizer App**  
**Learn more at [plasticizerfacts.com](http://plasticizerfacts.com)**



iPad® only\*

\* iPad® is a trademark of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

**ExxonMobil**  
Energy lives here™

Contact us for more information:  
[www.exxonmobilchemical.com](http://www.exxonmobilchemical.com)  
[www.jayflex.com](http://www.jayflex.com)

O0317-070E49

©2017 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Chemical" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.