



Exceed™ Tough+ Exceed™ Flow+ Exceed™ Stiff+ ExxonMobil™ LD



Windmüller & Hölscher and ExxonMobil Signature Polymers: Elevating lamination film designed for downgauging opportunities and processability performance

	Downgauging opportunity		Processability		Bubble stability
--	-------------------------	--	----------------	--	------------------

Data and results presented herein apply specifically to the noted application under this machine run sheet. Your results may differ depending on factors such as operating conditions, equipment and materials used.


Polymer properties	Exceed™ Tough+ m 1019	Exceed™ Flow+ m 0938	Exceed™ Stiff+ m 0926	Exceed™ Tough+ m 0814	ExxonMobil LD 3034	ExxonMobil LD 01820	Test method based on	Unit
Melt Index (190°C/2.16 kg)	1.0	0.90	0.85	0.80	3.0	0.18	ASTM D1238	g/10 min
Density	0.918	0.938	0.926	0.914	0.934	0.920	ASTM D792 or ASTM D1505	g/cm ³

For detailed product information, please consult the individual grade data sheet available on our website. Values given are typical and should not be interpreted as specifications. Data from tests performed by or on behalf of ExxonMobil.

Lamination film

Thickness: 90 µm

- Exceed™ Tough+ m 1019
- Exceed™ Flow+ m 0938
- Exceed™ Stiff+ m 0926
- Exceed™ Tough+ m 0814
- ExxonMobil™ LD 3034
- ExxonMobil™ LD 01820

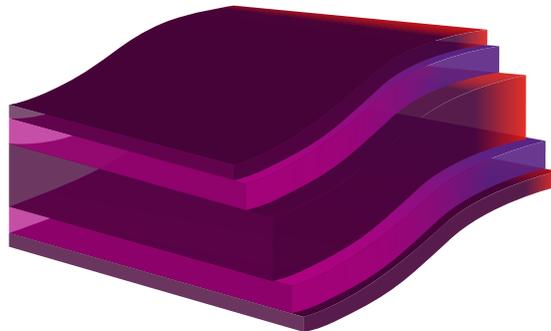

Scan to read the full story

exxonmobilchemical.com/k2025

2025-RTI-4983



© 2025 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

VAREX II

The VAREX II is based on a modular concept that allows almost unlimited configuration options. This high-output blown film line is the best choice for any demanding applications. Looking for high-performance 8 µm thick PE-HD liner films or 11-layer barrier films with an EVOH layer of only 1 µm?

The VAREX II can run it. Needless to say, the VAREX II is also the right choice for PE applications, recycling materials or biomaterials.

