




Exceed™ Flow Vistamaxx™

High tenacity power stretch film incorporating 35% post-consumer recycled content (PCR)

| | | | |
|---|---|--|--|
|  Incorporates 35% PCR content |  Load stability |  High tenacity |  High speed wrapping |
|---|---|--|--|

Data and results presented herein apply specifically to the noted application under this machine run sheet. Your results may differ depending on factors such as operating conditions, equipment and materials used.


| Polymer properties | Exceed™ Flow m 1716 | Exceed™ m 3516 | ExxonMobil™ C4LL 2818 | Vistamaxx™ 6000 | Vistamaxx 6202 | Test method based on* | Unit |
|-------------------------------------|---------------------|----------------|-----------------------|-----------------|----------------|-----------------------|-------------------|
| Melt Index (MI) (190 °C/2.16 kg) | 1.7 | 3.5 | 2.8 | 3.7 | 9.1 | ASTM D1238 | g/10 min |
| Density | 0.916 | 0.916 | 0.918 | 0.889** | 0.862** | ASTM D792 | g/cm ³ |

* For detailed product information, please consult the individual grade data sheet, available on our website: www.exxonmobilchemical.com. Values given are typical and should not be interpreted as specifications.

** Test based on ExxonMobil method.
Data generated by or on behalf of ExxonMobil Product Solutions.

Thickness: 10 µm

- Exceed™ m 3516
 - Vistamaxx™ 6202
 - Exceed™ Flow m 1716.PA
 - Vistamaxx™ 6000
 - ExxonMobil™ C4LL 2818
 - PCR from Saica.
- Reference: NC+ 8020AC PC

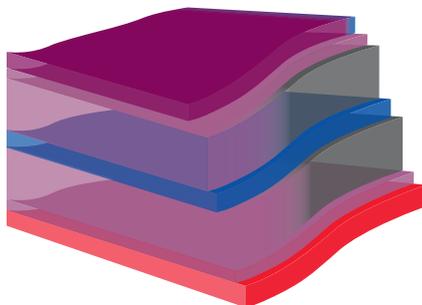

 Scan to read the full story

exxonmobilchemical.com/k2025



© 2025 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

ALLrollEX 3-up (1500 mm)



Equipment:

- Configuration: 5 extruders, 7-layer (ABCDCE)
- BIGMOUTH® in-line edge trim recovery system
- Feedback by CLOEREN
- CLOEREN Reflex touchless die
- Gravimetric unit DOTEKO GRADO-Adroit
- 4-chamber vacuum box
- Chill roll Ø 1400 mm
- Patented edge-pinning device
- ALLSpeedy IV winder
- SCANTECH thickness gauge unit
- Virtual Production Assistant MASTERMIND® by COLINES® (including APC)
- In-line edge-folding device
- 2" and 3" coreless shaft

Performance:

- Max output: 1.000 kg/h
- Max production speed: over 700 m/min
- Thickness range: 6-50 µm
- Automatic core thickness changeover without interrupting the production
- Reel format (width) changeover without interrupting the production

