



Maintaining performance with full-PE laminated packaging solutions



Improved
recyclability*



Excellent
optical
properties



High
stiffness



Bag drop
performance

Challenge:

Develop packaging solutions with improved potential for recycling while maintaining performance

Flexible packaging often includes multiple layers of different types of plastics to meet functionality requirements, but this may present a difficult end-of-life issue. Laminated films may consist of multi-materials that are difficult to sort and separate by recyclers, making them challenging to recycle.

[Huangshan Novel Co., Ltd.](#), a leading converter based in China specializing in plastic color printing, laminated films, vacuum metallized films and multi-functional films for packaging, wanted to develop a solution that would help address the problem of recycling multi-material flexible plastic packaging waste.

While improving potential for recycling, Huangshan Novel needed to make sure that packaging performance is maintained or even boosted.


Solution:

PE//PE laminated film structure based on ExxonMobil's performance polyethylene (pPE) portfolio to help boost performance


Design for recyclability*

A high quality mono-material packaging solution that can be mechanically recycled*

Full polyethylene laminates

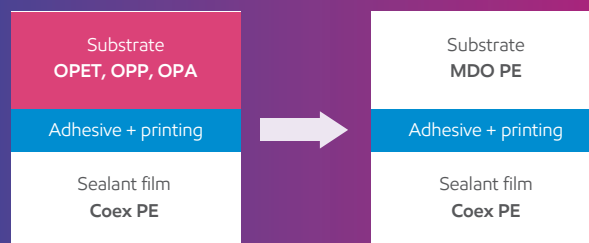


MDO PE substrate provides stiffness and optical properties for good printing**



■ Enable™ 4009
performance PE
■ Exceed™ XP
performance PE

PE sealant film provides toughness and low temperature sealing performance



■ Exceed XP
performance PE
■ Exceed™ 2012
performance PE

*Recyclable in communities with programs and facilities in place to collect and recycle plastic film.

**MDO: Machine Direction Orientation

Results:

Easier-to-recycle full PE solution with excellent end-use performance

Huangshan Novel and ExxonMobil worked together to test formulations of stand-up-pouches (SUP) made of MDO PE//PE laminate film including ExxonMobil's Exceed™ XP and Exceed™ 2012 performance PE. The films showed high stiffness and good optical performance, as well as outstanding bag drop and package integrity. They satisfy end users' needs for packaging performance, while helping them deliver sustainability benefits due to the mono-material structure that can improve recyclability*.

Compared to conventional laminated films, the MDO PE//PE show equivalent optics vs. BOPP//PE film, and similar stiffness to BOPP//PE and BOPA//PE films. During the bag drop test from 1.5 meters (5 feet) height, better performance than that of BOPET//PE film and equivalent to BOPA//PE film is demonstrated.


"Exceed XP performance PE's extreme performance, such as tensile strength, is critical for smooth MDO production. Together with medium density Enable™ 4009, the substrate film made using the MDO process can provide excellent stiffness and optical properties for shelf appeal; while the sealant film based on Exceed 2012 provides low SIT and high seal strength for package integrity. The performance of MDO PE//PE SUP is well-proven on packaging lines and in transportation tests. More importantly, this mono-material solution helps us and our customers deliver on our sustainability

commitment by increasing the recyclability of flexible packaging waste," said Mr. Wang Changchun, Deputy General Manager of Huangshan Novel. He continued, "This innovative full PE solution has been commercialized and we are receiving positive market feedback with interest from more and more brand owners. Due to the increasing global demand for packaging that can be recycled*, for example the strong regulatory drive for 'design for recyclability'* in Europe, we believe it has great potential in flexible packaging for food, dairy, pet food and personal daily care products, and will significantly help improve our competitiveness in both domestic and export business."


"ExxonMobil has been at the forefront of PE innovation for almost thirty years," said Royce Chen, North Asia Marketing Manager for polyethylene at ExxonMobil. "In April 2022, we commercialized Exceed™ S performance PE, which delivers industry leading combinations of stiffness and toughness while being easy to process. This new PE platform provides opportunities to reduce the complexity of film formulations, further enhance performance of full PE mono-material solutions, and increase production efficiencies."

Mr. Wang Changchun concludes, "The close collaboration between the two companies will definitely help us stay at the leading edge to meet evolving consumer needs and trends towards the creation of solutions with sustainability benefits."

Stiffness and optics vs. conventional laminates

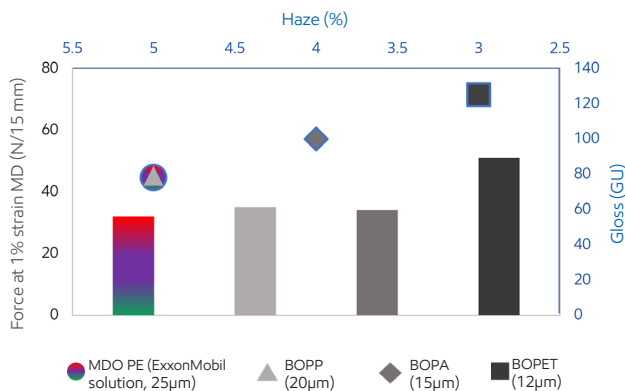

Bag drop performance vs. conventional laminates at height of 1.5 meters (5 feet)

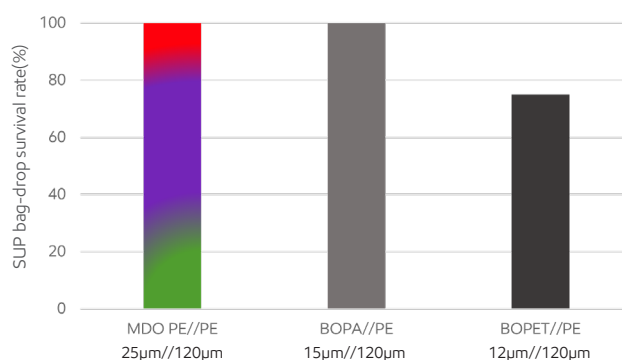

Based on ExxonMobil typical formula; data from tests performed by or on behalf of ExxonMobil.

Why ExxonMobil PE? Why today?

tomorrow's
performance
today

©2023 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Product Solutions" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Product Solutions Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

Contact us for more information:
exxonmobilchemical.com/pe

E1222-652E15

ExxonMobil