



Asia Pacific, Europe, Middle East and Africa portfolio

Solutions to meet your BOPP sealing, barrier and mechanical performance needs

Energy lives here™

As a reliable global supplier to the flexible packaging industry, we offer a broad portfolio of resins that meet the sealing, barrier and mechanical performance needs of BOPP films.

BOPP continues to meet the challenges of food packaging trends, resulting in the 8Mt BOPP market growing by nearly 5% AAGR. Key drivers include:


- **On-the-go convenience**
As small and single-serve portions gain popularity, the demand for faster packaging operations also rises.
- **Quick and easy meals**
Due to the perishability of ready-made meals, seal hermeticity is critical to keeping these products fresh and safe for consumption.
- **Shelf appeal**
Packaging designs are becoming increasingly sophisticated, resulting in more challenging sealing requirements.
- **Global food market**
Leak-free and airtight packaging is critical to extending product shelf life.



Better packaging integrity

Vistamaxx™ 3588FL performance polymer provides low seal-initiation temperature (SIT < 90°C) and a broad hot tack window. Featuring characteristics and capabilities with improved sealing potential, Vistamaxx 3588FL also offers improved seal hermeticity. Vistamaxx 3588FL polymer is capable of balancing processability in filmmaking — resulting in improved product quality and the potential for overall lower costs versus comparable resins.

Seal performance

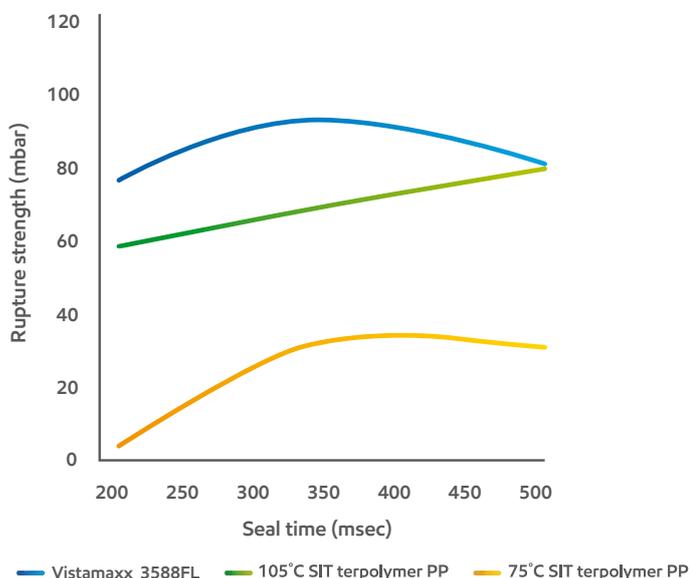


Tested at 110°C seal temperature in laminated structure:
20µm BOPP / adlam / 25µm BOPP sealant



Improved film properties

Opera™ PR 100 improves barrier performance (WVTR and OTR) and mechanical properties (stiffness and strength), while enhancing optical properties (decreased haze and improved clarity) — resulting in not only improved film performance, but also an opportunity to downgauge to lower film thicknesses. Opera PR 100 can also enhance the shrink performance of box overwrap films, such as in tobacco film applications.

Barrier properties

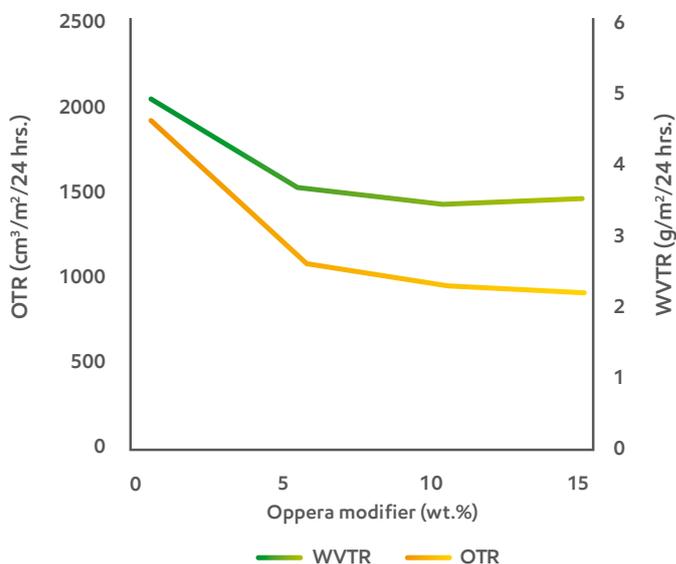

25 micron films.
Test methods: OTR (23°C, 0% relative humidity) based upon ASTM D3985
WVTR (38°C, 90% relative humidity) based upon ASTM F1249
Mechanical properties based upon ASTM D882
Light transmission based upon ASTM D1003.

©2017 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Chemical" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.

Contact us for more information:
exxonmobilchemical.com

XO917-000E49

ExxonMobil
Energy lives here™